

M12 MALE 0° SHIELDED WIREABLE SCREW TERM.

8-pol. max.0.5mm² 6-8mm


Male straight
M12, 8-pole
shielded
Sealing range (cable Ø): 6...8 mm

[Link to Product](#)

Illustration



Male



Product may differ from Image

Approvals



Form

Form 17341



Technical Data

Operating voltage	max. 30 V AC/DC
Operating current per contact	max. 2 A
Connection cross section	max. 0.5 mm²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated

General data

Temperature range -40...+85 °C

Commercial data	
country of origin	DE
customs tariff number	85366990
EAN	4048879195317
eClass	27279221
Packaging unit	1
Sketch	

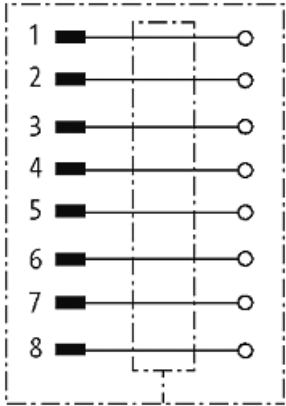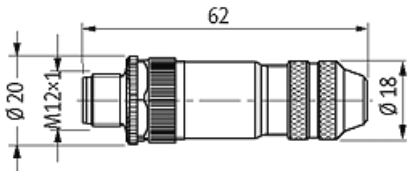

Product may differ from Image